

 <b>FUZETEC</b>	<b>NO.</b>	<b>PQ03-01E</b>		
	<b>Product Specification and Approval Sheet</b>	<b>Version</b>	<b>2</b>	<b>Page</b>

## Axial Leaded PTC Resettable Fuse: FSR Series

### 1. Summary

- (a) **Applications:** Rechargeable battery packs, Lithium cell and battery packs
- (b) **Product Features:** Low profile, Solid state
- (c) **Operation Current:** 1.2A~4.2A
- (d) **Maximum Voltage:** 15V and 30V
- (e) **Temperature Range :** -40 to 85

### 2. Agency Recognition

**UL:** File No. E211981  
**TÜV:** File No. R3-50004084

### 3. Electrical Characteristics (23 )

Part Number	Fig	Hold Current $I_H$ , A	Trip Current $I_T$ , A	Rated Voltage $V_{MAX}$ , Vdc	Maximum Current $I_{MAX}$ , A	Typical Power $P_d$ , W	Resistance Tolerance		
							$R_{MIN}$ ohms	$R_{MAX}$ ohms	$R_{1MAX}$ ohms
<b>FSR120</b>	1	1.2	2.7	15	100	1.2	0.085	0.160	0.220
<b>FSR120S</b>	2	1.2	2.7	15	100	1.2	0.085	0.160	0.220
<b>FSR175</b>	1	1.75	3.8	15	100	1.5	0.050	0.090	0.120
<b>FSR175S</b>	2	1.75	3.8	15	100	1.5	0.050	0.090	0.120
<b>FSR200</b>	1	2.0	4.4	30	100	1.9	0.030	0.060	0.100
<b>FSR350</b>	1	3.5	6.3	30	100	2.5	0.017	0.031	0.050
<b>FSR420</b>	1	4.2	7.6	30	100	2.9	0.012	0.024	0.040


$I_H$ =Hold current-maximum current at which the device will not trip at 23 °C still air.  
 $I_T$ =Trip current-minimum current at which the device will always trip at 23 °C still air.  
 $V_{MAX}$ =Maximum voltage device can withstand without damage at its rated current.  
 $I_{MAX}$ = Maximum fault current device can withstand without damage at rated voltage ( $V_{MAX}$ ).  
 $P_d$ =Maximum power dissipated from device when in tripped state in 23 °C still air environment.  
 $R_{MIN}$ =Minimum device resistance at 23 °C.  
 $R_{1MAX}$ =Maximum device resistance at 23 °C, 1 hour after tripping.  
Physical specifications:  
Lead material:0.13mm nominal thickness, quarter-hard nickel.  
Insulating material Polyester tape.

*Atom Electronics Ltd.*

**NOTE : Specification subject to change without notice.**




**4. Production Dimensions (millimeter)**

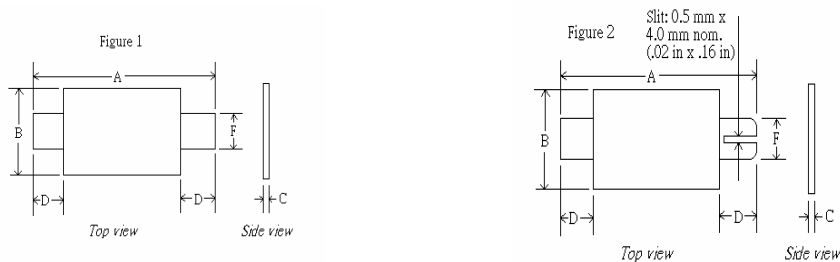

Part Number	Fig	A		B		C		D		F	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
FSR120	1	19.9	22.1	4.9	5.2	0.6	1.0	5.5	7.5	3.9	4.1
FSR120S	2	19.9	22.1	4.9	5.2	0.6	1.0	5.5	7.5	3.9	4.1
FSR175	1	20.9	23.1	4.9	5.2	0.6	1.0	4.1	5.5	3.9	4.1
FSR175S	2	20.9	23.1	4.9	5.2	0.6	1.0	4.1	5.5	3.9	4.1
FSR200	1	21.3	23.4	10.2	11.0	0.5	1.1	5.0	7.6	4.8	5.4
FSR350	1	28.4	31.8	13.0	13.5	0.5	1.1	6.3	8.9	6.0	6.6
FSR420	1	30.6	32.4	12.9	13.6	0.5	1.1	5.0	7.5	6.0	6.7

**5. Thermal Derating Curve**

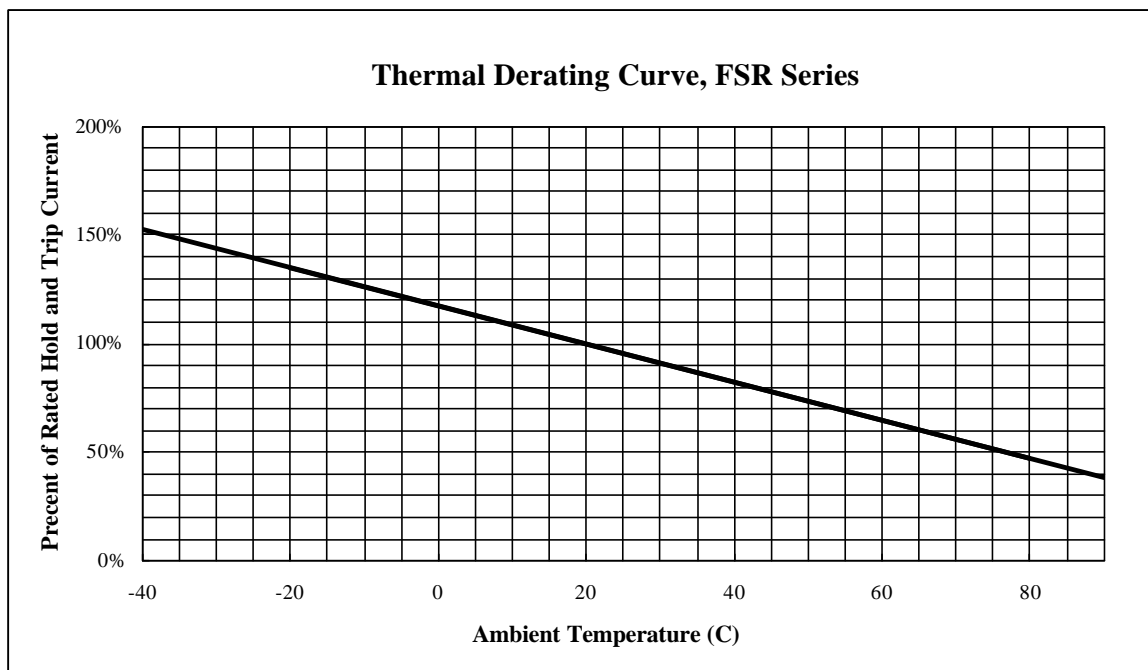


Atom Electronics Ltd.

NOTE : Specification subject to change without notice.



### 6. Typical Time-To-Trip at 23

- A =FSR120/FSR120S
- B =FSR175/FSR175S
- C =FSR200
- D =FSR350
- E =FSR420


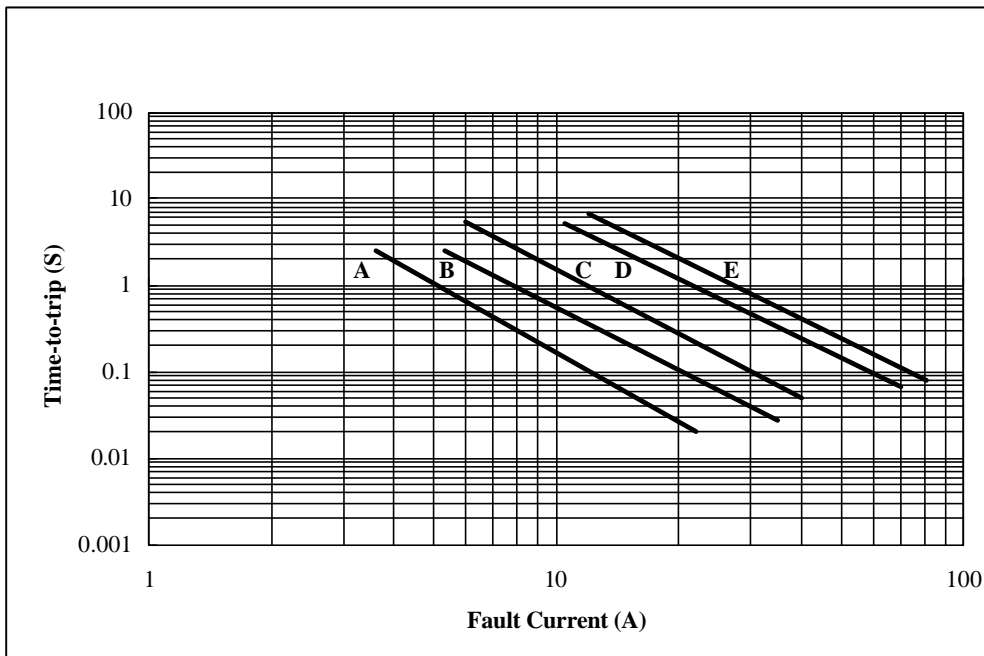


### 7. Material Specification


Lead material: 0.13 mm nominal thickness, quarter-hard nickel  
 Insulating material: Polyester tape

### 8. Part Numbering and Marking System

#### Part Numbering System

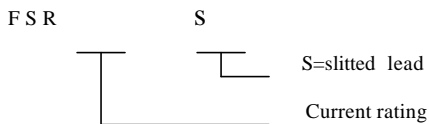

#### Part Marking System

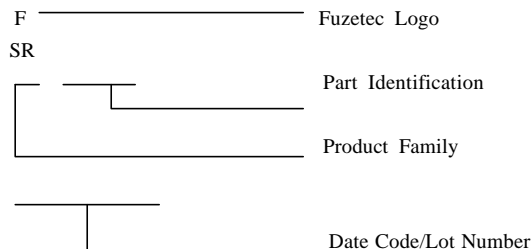

**Warning:** -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Atom Electronics Ltd.

NOTE : Specification subject to change without notice.