

 FUZETEC	NO.	PQ19-01E		
	Product Specification and Approval Sheet	Version	13	Page

Surface Mountable PTC Resettable Fuse: FSMD1210 Series

1. Summary

- (a) **RoHS Compliant (Lead Free) Product**
- (b) **Applications: All high-density boards**
- (c) **Product Features: Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices**
- (d) **Operation Current: 0.05A~1.5A**
- (e) **Maximum Voltage: 6V~60V**
- (f) **Temperature Range : -40°C to 85°C**

2. Agency Recognition

UL : File No. E211981
C-UL: File No. E211981
TUV: File No. R50090556

Note: FSMD110-1210R & FSMD150-1210R UL & C-UL and TUV Pending

3. Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max Current	Typical Power	Max Time to Trip		Resistance Tolerance	
						Current	Time	R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	V _{MAX} , Vdc	I _{MAX} , A	Pd, W	Amp	Sec	Ω	Ω
FSMD005-1210	0.05	0.15	60	10	0.60	0.25	1.50	3.600	50.000
FSMD010-1210	0.10	0.25	60	10	0.60	0.50	1.50	1.600	15.000
FSMD020-1210	0.20	0.40	30	10	0.60	8.00	0.02	0.800	5.000
FSMD035-1210	0.35	0.70	16	40	0.60	8.00	0.20	0.320	1.300
FSMD050-1210	0.50	1.00	16	40	0.60	8.00	0.10	0.250	0.900
FSMD075-1210	0.75	1.50	8	40	0.60	8.00	0.10	0.130	0.400
FSMD110-1210R	1.10	2.20	6	100	0.80	8.00	0.30	0.060	0.210
FSMD150-1210R	1.50	3.00	6	100	0.80	8.00	0.50	0.040	0.110

I_H=Hold current-maximum current at which the device will not trip at 23°C still air.

I_T=Trip current-minimum current at which the device will always trip at 23°C still air.

V_{MAX}=Maximum voltage device can withstand without damage at it rated current.(I_{MAX})

I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).

Pd=Typical power dissipated-type amount of power dissipated by the device when in the tripped state in 23°C still air environment.

R_{MIN}=Minimum device resistance at 23°C prior to tripping.


R_{1MAX}=Maximum device resistance at 23°C measured 1 hour post trip.

Termination pad characteristics

Termination pad materials: Pure Tin


NOTE : Specification subject to change without notice.

4. FSMD Product Dimensions (Millimeters)

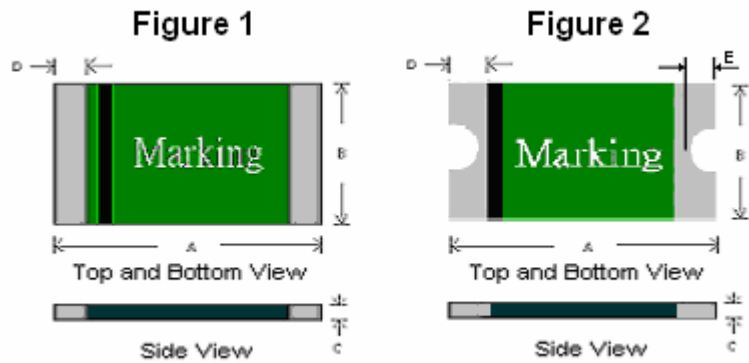


Part Number	Figure	A		B		C		D		E	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
FSMD005-1210	1	3.00	3.43	2.35	2.80	0.60	1.15	0.25	0.75	—	—
FSMD010-1210	1	3.00	3.43	2.35	2.80	0.60	1.15	0.25	0.75	—	—
FSMD020-1210	1	3.00	3.43	2.35	2.80	0.40	0.85	0.25	0.75	—	—
FSMD035-1210	1	3.00	3.43	2.35	2.80	0.40	0.80	0.25	0.75	—	—
FSMD050-1210	1	3.00	3.43	2.35	2.80	0.30	0.75	0.25	0.75	—	—
FSMD075-1210	1	3.00	3.43	2.35	2.80	0.30	0.70	0.25	0.75	—	—
FSMD110-1210R	2	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD150-1210R	2	3.00	3.43	2.35	2.80	0.50	0.90	0.25	0.75	0.10	0.45

5. Thermal Derating Curve

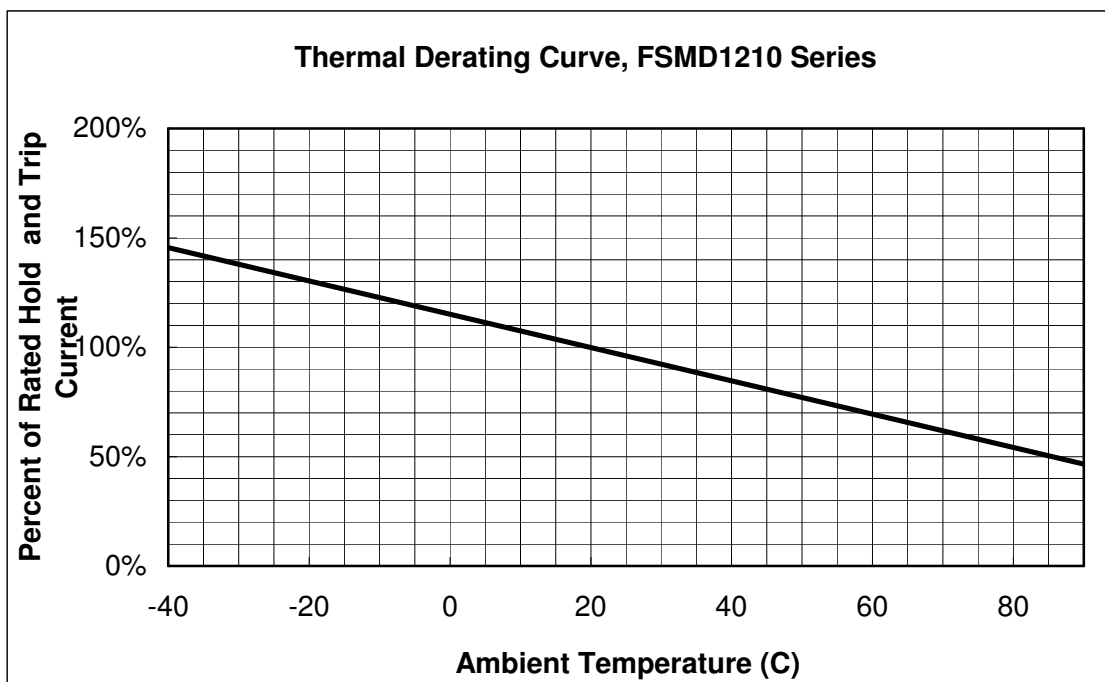

6. Typical Time-To-Trip at 23°C

A = FSMD005-1210
 B = FSMD010-1210
 C = FSMD020-1210
 D = FSMD035-1210
 E = FSMD050-1210
 F = FSMD075-1210
 G = FSMD110-1210R
 H = FSMD150-1210R

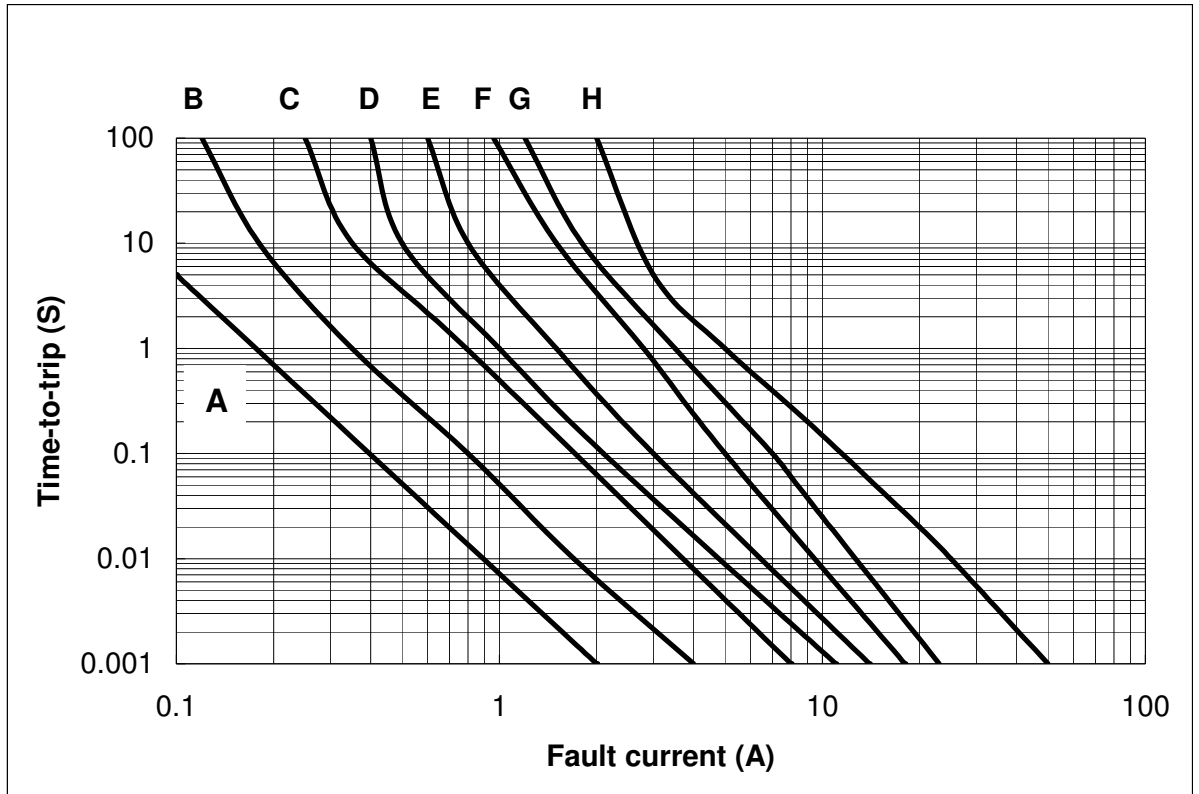

7. Material Specification

Terminal pad material: Pure Tin

Soldering characteristics: Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3

8. Part Numbering and Marking System

Part Numbering System

FSMD □ □ □ - 1210 R

_____ Current rating

F75

Example

Part Marking System

F □ □
 _____ Part Identification
 _____ Fuzetec Logo

F05 = FSMD005-1210
 F10 = FSMD010-1210
 F20 = FSMD020-1210
 F35 = FSMD035-1210
 F50 = FSMD050-1210
 F75 = FSMD075-1210
 F11 = FSMD110-1210R
 F15 = FSMD150-1210R

Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.




-PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

-Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

NOTE : Specification subject to change without notice.

9. Pad Layouts 、 Solder Reflow and Rework Recommendations

The dimension in the table below provide the recommended pad layout for each FSMD1210 device



Pad dimensions (millimeters)

Device	A Nominal	B Nominal	C Nominal
All 1210 Series	2.00	1.00	2.80

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (T_{smax} to T_p)	3 °C/second max.
Preheat :	
Temperature Min (T _{smin})	150 °C
Temperature Max (T _{smax})	200 °C
Time (t _{smin} to t _{smax})	60-180 seconds
Time maintained above:	
Temperature(T _L)	217 °C
Time (t _L)	60-150 seconds
Peak/Classification Temperature(T_p) :	260 °C
Time within 5°C of actual Peak :	
Temperature (t _p)	20-40 seconds
Ramp-Down Rate :	6 °C/second max.
Time 25 °C to Peak Temperature :	8 minutes max.


Note 1: All temperatures refer to of the package,
measured on the package body surface.

Solder reflow

- ※ Due to "Lead Free" nature, Temperature and Dwelling time for the soldering zone is higher than those for Regular. This may cause damage to other components.
1. Recommended max past thickness > 0.25mm.
 2. Devices can be cleaned using standard methods and aqueous solvent.
 3. Rework use standard industry practices.
 4. Storage Environment : < 30°C / 60%RH

Caution:

1. If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
2. Devices are not designed to be wave soldered to the bottom side of the board.

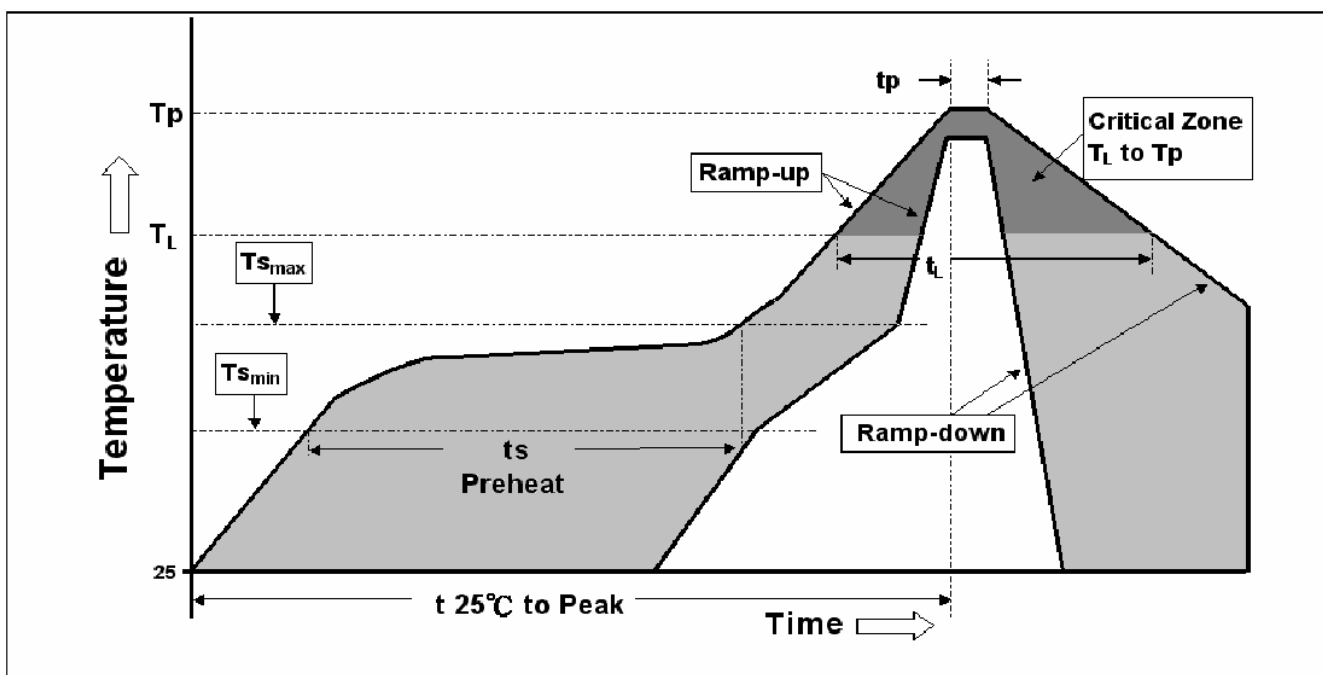

NOTE : Specification subject to change without notice.